



“PRE-PACKAGED” SYSTEMS
To fit many standard applications!

“Available options too numerous to list!”



MODEL 2293 Air-Hydraulic Unit

- Fully adjustable 2” stroke
- 3/4” AA spindle
- In line hub drive
- 3/4 HP 1800 RPM motor
- 5 step pulleys (830-1330-1750-2270-3650 RPMs)
- Depth Switch
- Full retract interlock switch
- Single Solenoid cycle control valve with manual actuator
- Extended belt housing (with belt)

*Call for current pricing and options!


HOLOMATIC UNIT FEATURES

- Pressure compensating feed valves!
- Adjustable, constant feed rates!
- Adjustable stroke length (most models in .001 increments)
- Adjustable rapid travel
- Positive stop on centerline
- Concentric “on centerline” thrust forces!

**ABOVE PACKAGES AT “FAR LESS” THAN
LIST PRICE!**

Hause Machines, Inc.
809 S. Pleasant St.
Montpelier, OH 43543

Phone	419-485-3158
Toll Free	800-932-8665
Fax	419-485-3146
E-mail	hause@bright.net
Web Page	www.hausemachinesinc.com

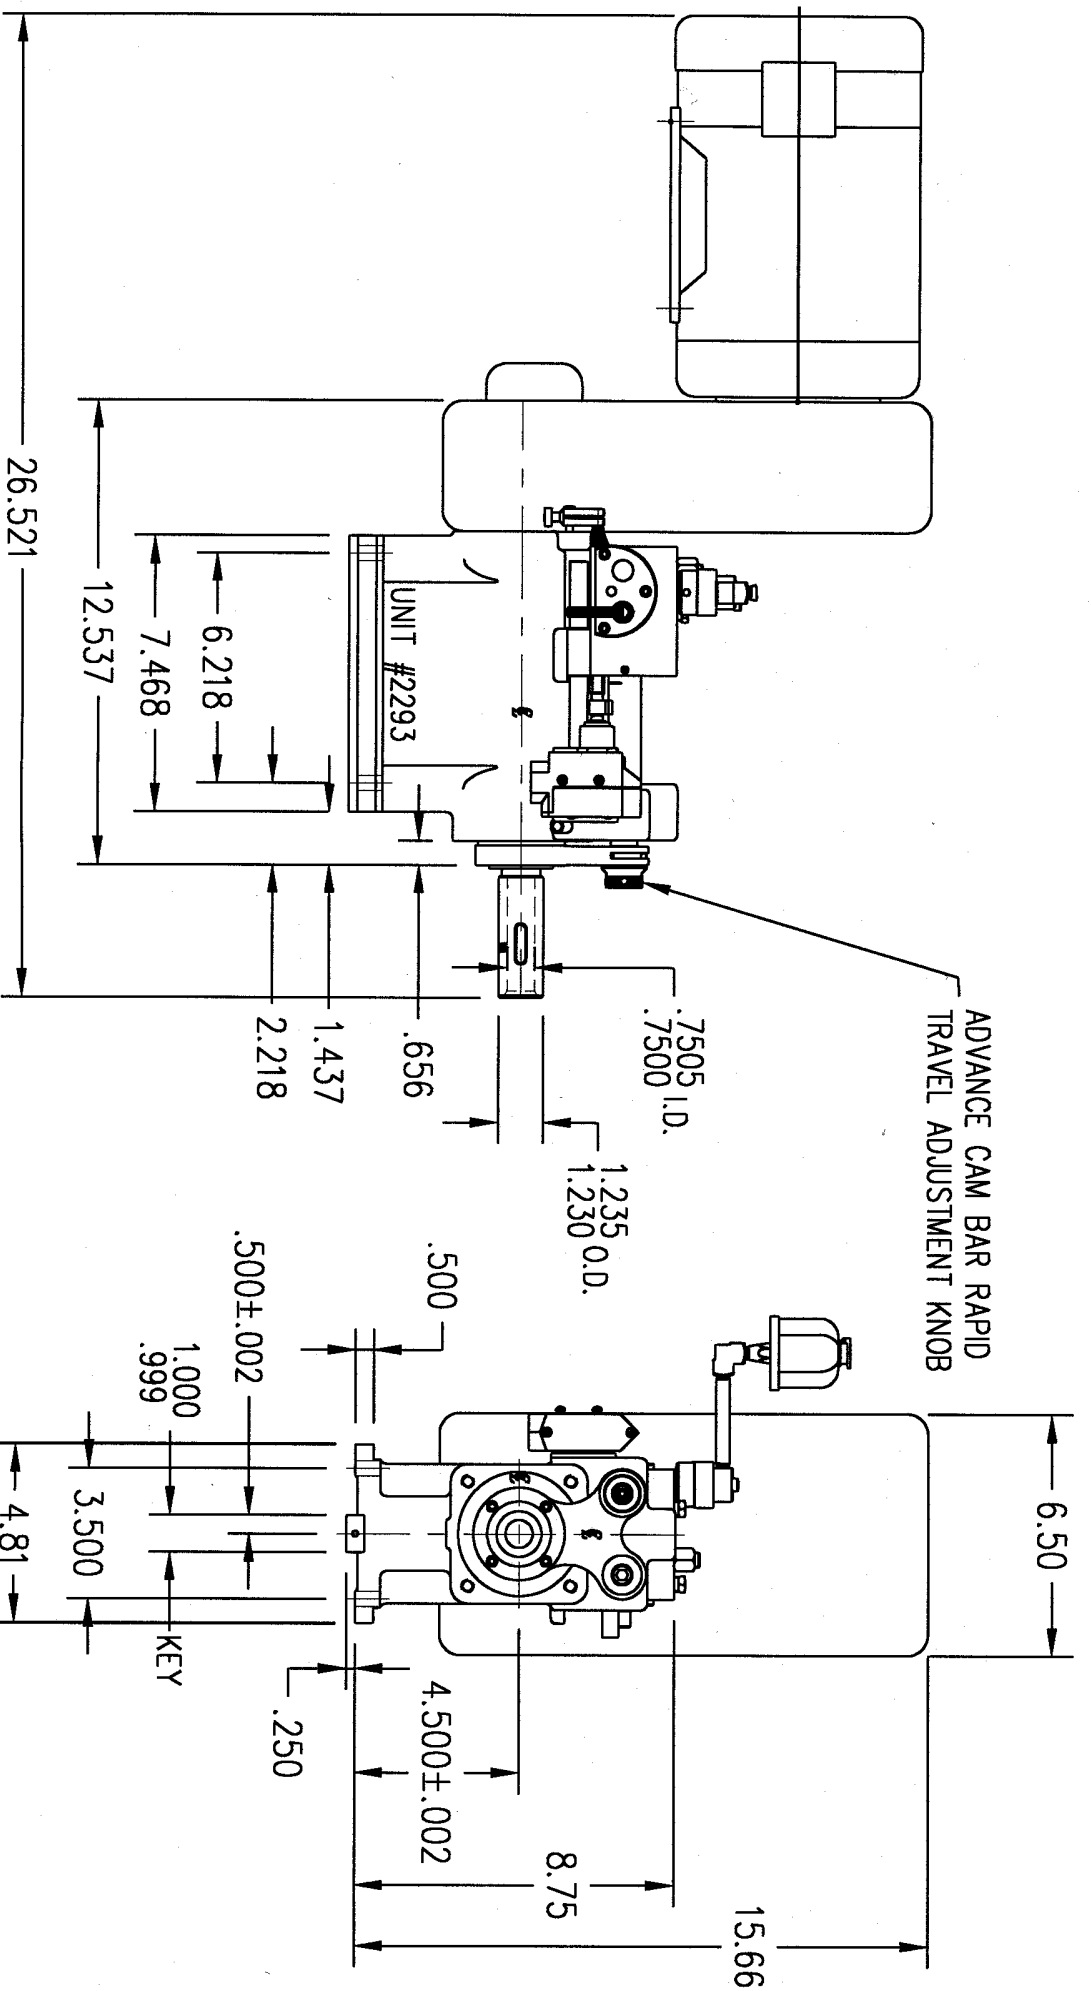

FEATURES

- Pressure compensating feed valves provide constant feed rates
- Concentric construction - all forces are directly on the units' centerline
- Keyed base for alignment
- Mount in any position or angle
- Fully adjustable feed rates, rapid travel distance and depth

SPECIFICATIONS

- Stroke - Up to 2"
- Advance thrust - 440# @ 80 psi (Air)
- Advance feed rates - adjustable to 250 I.P.M. (load compensated)
- *Retract thrust - 160# @ 80 psi (Air)
- *Retract feed rates - adjustable to 125 I.P.M. (load compensated)
- Depth repeatability - ±.0005 w/short dwell period
- Mounting positions - Unlimited

*When applicable