




**“PRE-PACKAGED” SYSTEMS  
To fit many standard applications!**

**“Available options too numerous to list!”**

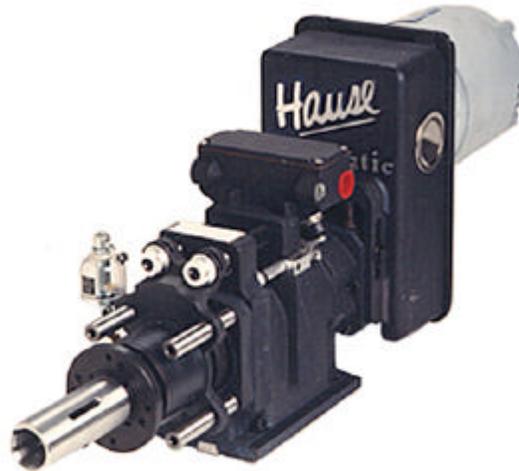

### **MODEL 7204 Lead Screw Unit**

- 2" lead screw travel – Fully adjustable (specify pitch)
- 1-3/8" AA spindle
- In line shaft drive
- .97 HP/1090 RPM 230/460 3ph reversing brake motor
- 5 step pulleys (520-840-1090-1360-2180 RPMs)
- Extended belt housing (with belt)
- Control switches

**Note: Units with longer lead screw travel and high torque units for heavy duty applications are also available.**

\*Call for current pricing and options!


#### HOLOMATIC UNIT FEATURES

- Standard and Metric thread pitches
- Adjustable stroke length
- Easy adjustments
- “No hole” Safety Switch
- Concentric “on centerline” thrust forces!

**ABOVE PACKAGES AT “FAR LESS” THAN  
LIST PRICE!**

Hause Machines, Inc.  
809 S. Pleasant St.  
Montpelier, OH 43543

Phone	419-485-3158
Toll Free	800-932-8665
Fax	419-485-3146
E-mail	hause@bright.net
Web Page	<a href="http://www.hausemachinesinc.com">www.hausemachinesinc.com</a>

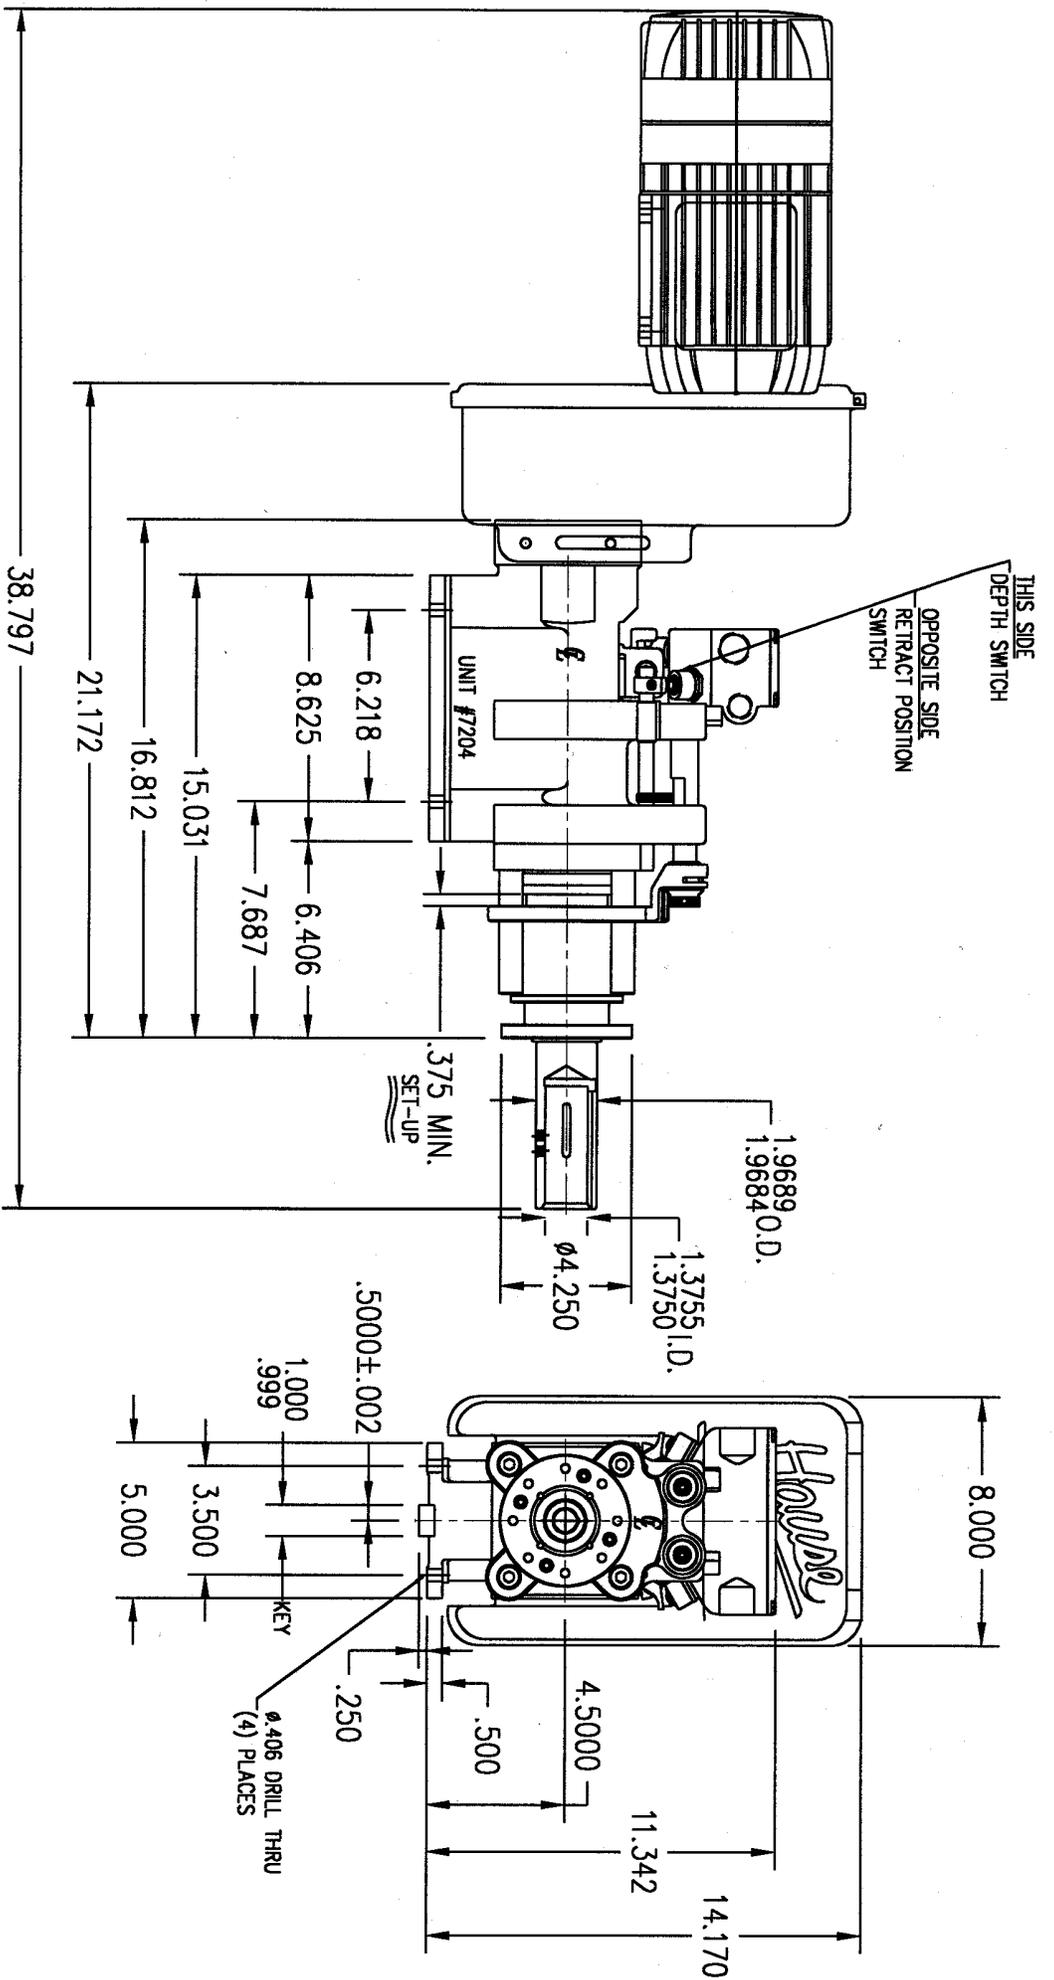

## FEATURES

- Concentric construction
- Easily changed leadscrews & nuts
- Stroke adjustable through the feed range. 2"
- "No Hole" Safety switch
- Keyed base for alignment

## SPECIFICATIONS

- Tap or thread 8 to 56 TPI in mild steel (metric also)
- 2" maximum stroke
- Positive leadscrew action through cycle
- Depth repeatable to 1/8 revolution @ 1000 rpm