




Multiple Spindle Head




U Type
NU type

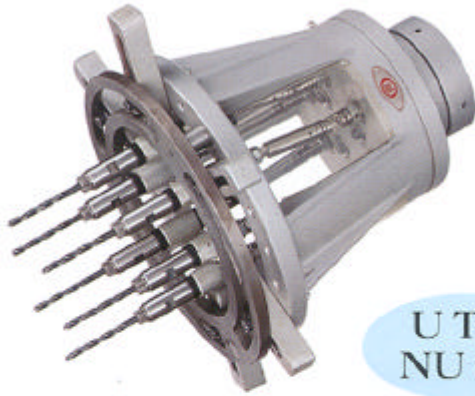

U Type
NU type



Fix, Adjustable Adapter

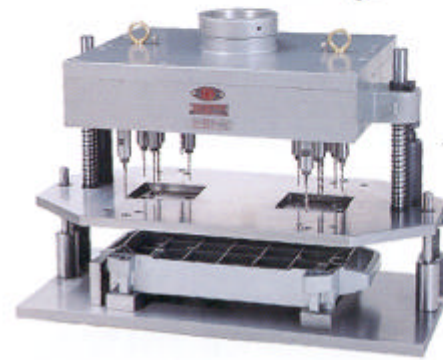



Fixed Pattern

Guide Bush Plate

Fixture base

Fix, Guide Bush Plate

U Type

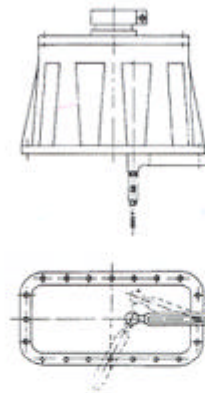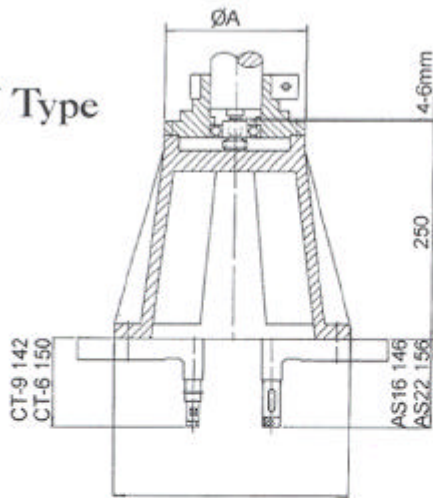

Model	NU-165	U-165	U-200	U-250	U-300	Fixed Type
Max. Distance between Spindles	165	165	200	250	300	By order
Min. Pitch Diameter						
Min. Distance between Spindles	12.5	18.5	18.5	18.5	18.5	10.0
Ratio of input/output RPM	1:1	1:1	1:1	1:1	1:1	By order
Max. Drilling Capacity in Mild Steel (mm)	$\varnothing 4.5$	$\varnothing 13$	$\varnothing 13$	$\varnothing 13$	$\varnothing 13$	By order
Max. Tapping Capacity in Mild Steel (mm)	M4	M12	M12	M12	M12	By order
Number of Spindles	2~10	2~10	2~10	2~12	2~10	By order